

ENGINEERS • PLANNERS • SCIENTISTS • CONSTRUCTION MANAGERS

936 RIDGEBROOK ROAD • SPARKS, MD 21152 • 410-316-7800 • (FAX) 410-316-7935

May 23, 2023

Mr. Brian Croyle, Environmental Specialist Montgomery County Public Schools Division of Sustainability and Compliance 8301 Turkey Thicket Drive Gaithersburg, MD 20879

Ref: Sampling for Asphalt Fumes and Hydrogen Sulfide Gas – 5.8.2023

Poolesville High School KCI Job No. 122302497

KCI Technologies Inc. (KCI) is submitting the following letter report detailing the findings of air sampling of Asphalt Fumes (benzene soluble fraction) and Hydrogen Sulfide gas at Poolesville High School located at 17501 W. Willard Rd. Poolesville, MD 20837 (subject site). Baseline sampling was conducted by KCI's Industrial Hygienist, Ms. Brittany Maas, under the oversight of KCI's Certified Industrial Hygienist (CIH), Mr. Jonathan Coale.

Background:

At Poolesville High School, current renovations and construction has raised concerns from student parents. Students and faculty have voiced concerns related to an odor present in the school while the roofing work is occurring. The parents are concerned the students are being exposed to unsafe conditions related to the asphalt fumes being produced during the roofing installation. MCPS contacted KCI to assist them in collecting data on the school's occupants' potential exposure to fumes related to the roofing work being conducted.

Description of the Work Performed:

On May 8, 2023, KCI conducted air sampling for Asphalt Fumes (benzene soluble fraction) and Hydrogen Sulfide gas levels at Poolesville High School. The sampling of Asphalt Fumes (benzene soluble fraction) was done under method: Modified NIOSH 5042. This method will determine the total concentration of total particulate and the soluble fraction to which an individual is exposed. NIOSH has an adopted value of 5 mg/m³ Threshold Limit Value (TLV) -Time-Weighted Average (TWA) for asphalt fumes. NIOSH's definition of TLV-TWA is the "concentration for a conventional 8-hour workday and a 40-hour workweek, to which it is believed that nearly all workers may be repeatedly exposed, day after day, for a working lifetime without adverse effect". KCI also utilized a mulit-gas meter to collect real time readings of hydrogen sulfide (H₂S), carbon monoxide (CO), and oxygen (O₂) levels in various locations throughout the building and exterior. Direct read data was performed to collect short term "grab" samples to determine if the gas was present and was not intended to collect exposure data.

During the time of the air sampling, construction was being conducted, there was no asphalt smell noted outside of the building. KCI placed six (6) sampling pumps set to approximately 1 liter per minute in locations pre-determined by MCPS. It is KCI's understanding that the sample locations selected by MCPS were where complaints were made from students. After all sampling pumps were placed, KCI took real time readings of the hydrogen sulfide levels at each of these locations every 30 minutes inside and

KCI Technologies, Inc. www.kci.com

every 30 minutes outside. A sampling location map can be found in attachment A.

KCI conducted the screening from approximately 07:45 until 14:30. Conditions during the sampling period were clear skies and 58°F - 65°F. Winds were between 0 and 16mph with gusts up to 26mph from SSW, WNW, NW, and N.

After sampling, the cassettes were sealed, logged, bagged, and shipped as required to Galson Laboratories in East Syracuse, NY, where they were analyzed for Asphalt Fume (benzene soluble fraction) Modified NIOSH Method 5042. Galson Laboratories is accredited by the American Industrial Hygiene Association (#100324).

Results:

Asphalt Fumes (Benzene Soluble Fraction)

Table 1 – Asphalt Fumes Sampling Summary								
Location	Sample Number	Concentration (mg/m³)	Above TLV-TWA?					
Arts Hallway – Outside Room 44	PHS – 01E	< 0.28	No					
Auditorium Lobby	PHS – 02E	<0.28	No					
Science Building 1st Floor – Outside Room 184	PHS – 03E	<0.28	No					
Science Building 2 nd Floor – Outside Room 284	PHS – 04E	<0.28	No					
Outside Gym Entrance (exterior)	PHS – 05E	< 0.28	No					
West End of Portables	PHS – 06E	< 0.28	No					
Field Blank	PHS - 07E	N/A	N/A					
Lab Blank	PHS – 08E	N/A	N/A					
N/A: Not Applicable								

Laboratory analysis results are included as Attachment B.

Gas Meter Readings

Table 2 – Multi-Gas Meter Sampling Summary								
Time Oxygen (O2) Carbon Monoxide (CO) Hydrogen Sulfide (I								
0745 - 0815	20.8	0	0					
0915 - 0945	20.8	0	0					
1045-1115	20.8	0	0					
1230 - 1300	20.8	0	0					
1345 - 1430	20.8	0	0					

Olfactory Findings

During walkthroughs, KCI noted the following asphalt smells:

Table 3 – Olfactory Investigation Summary									
Location		Findings							
Location	Morning	Mid-Day	End of Day						
Exterior Outside New Main	No Asphalt Smell	No Asphalt Smell	No Asphalt Smell						
Office									
Exterior Between Main Building	Moderate Asphalt	Light Asphalt	No Asphalt Smell						
& Science/Tech Addition	Smell	Smell							
Exterior By Portables	No Asphalt Smell	Light Asphalt	No Asphalt Smell						
		Smell							
Main Lobby	No Asphalt Smell	No Asphalt Smell	No Asphalt Smell						
Art Hallway	No Asphalt Smell	No Asphalt Smell	No Asphalt Smell						
Auditorium Corridor	No Asphalt Smell	No Asphalt Smell	No Asphalt Smell						
Gym Hallway	No Asphalt Smell	No Asphalt Smell	No Asphalt Smell						
Science and Technology	No Asphalt Smell	No Asphalt Smell	No Asphalt Smell						
Addition									
Student Parking Lot	No Asphalt Smell	No Asphalt Smell	No Asphalt Smell						

Conclusion:

In conclusion, the baseline sampling data determined airborne Asphalt Fumes concentrations were below the NIOSH TLV-TWA adopted value during the period of sampling. In addition, H₂S and CO concentrations were not present or at concentrations below the gas meters detectable range. Oxygen levels were at the expected levels.

During sampling, asphalt roofing activities were being performed.

If you have questions or comments regarding this report, please contact me.

Sincerely,

KCI Technologies, Inc


Tyler McCleaf, CSP, RMP Certified Safety Professional KCI Technologies, Inc.


Tyler McCleaf

Attachment A: Sample Locations

Attachment B: Laboratory Certificate of Analysis Report for Air Samples

Attachment A Field Notes

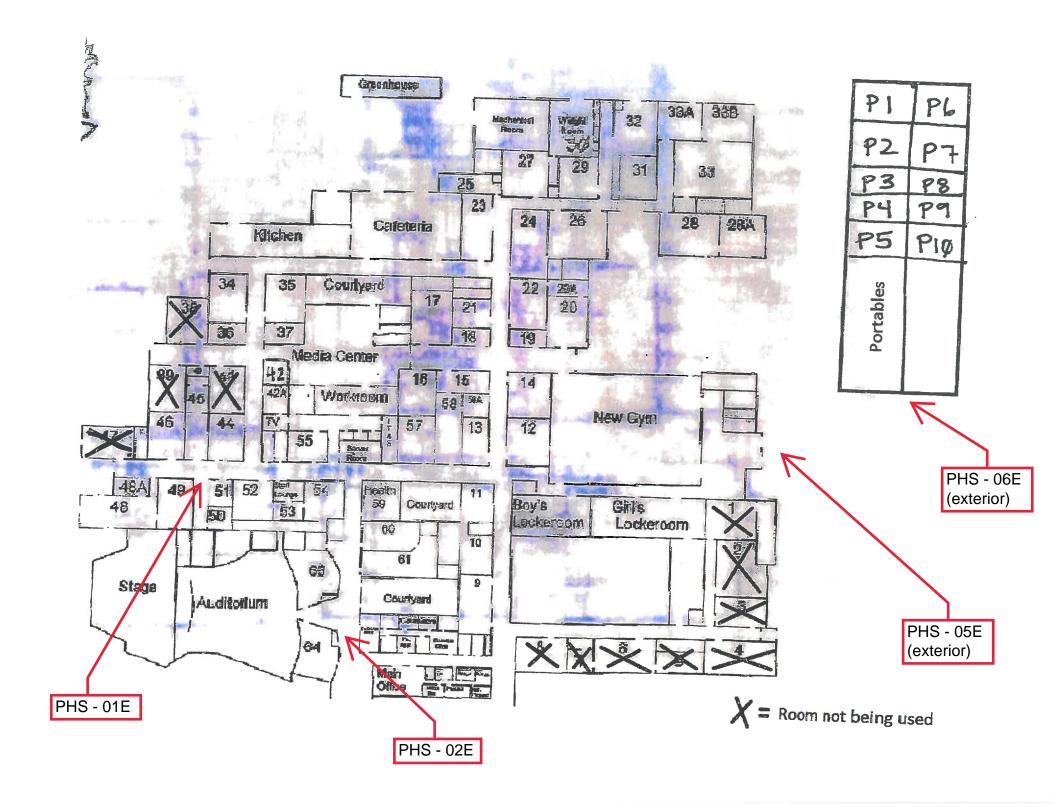

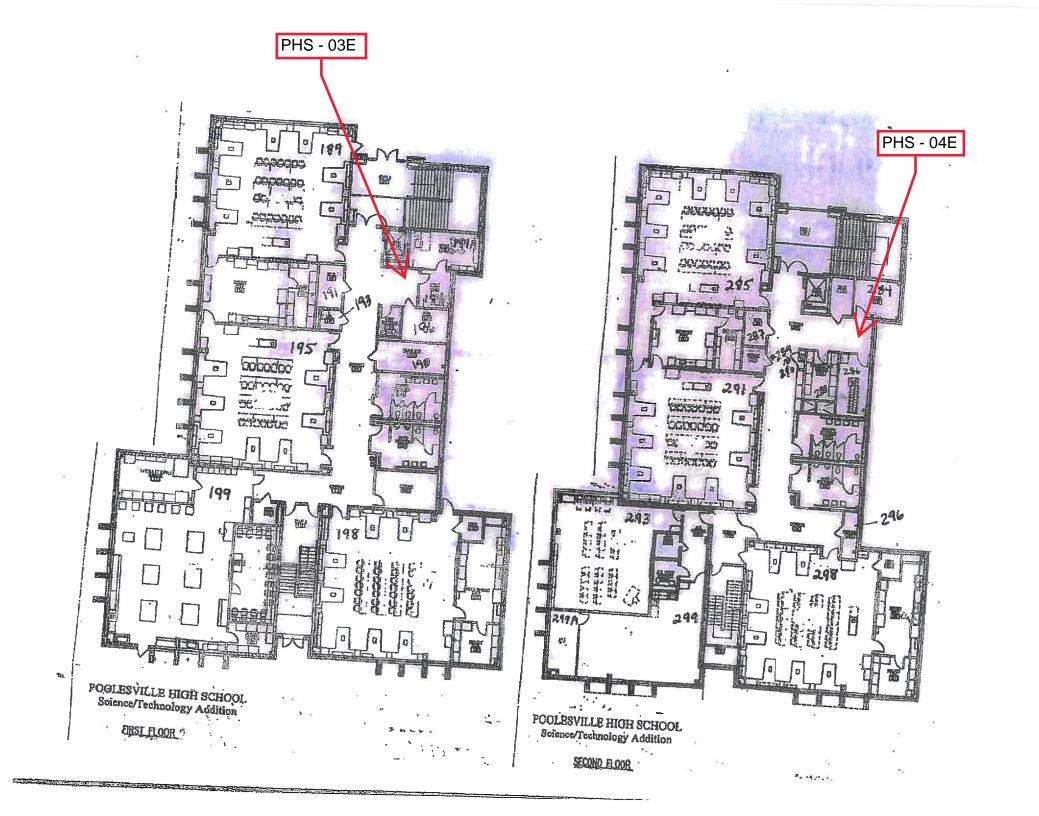

Attachment B Laboratory Certificate of Analysis Report for Air Samples



Jon Coale KCI Technologies 936 Ridgebrook Road Sparks Glencoe, MD 21152 May 15, 2023

Account# 17844 Login# L593540

Dear Jon Coale:

Enclosed are the analytical results for the samples received by our laboratory on May 09, 2023. All samples on the chain of custody were received in good condition unless otherwise noted. Any additional observations will be noted on the chain of custody.

Please contact client services at (888) 432-5227 if you would like any additional information regarding this report. Thank you for using SGS Galson.

Sincerely,

SGS Galson

Lisa Swab Laboratory Director

Lisa Luab

Enclosure(s)



ANALYTICAL REPORT

Terms and Conditions & General Disclaimers

- This document is issued by the Company under its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.
- Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Analytical Disclaimers

- Unless otherwise noted within the report, all quality control results associated with the samples were within established control limits or did not impact reported results.
- Note: The findings recorded within this report were drawn from analysis of the sample(s) provided to the laboratory by the Client (or a third party acting at the Client's direction). The laboratory does not have control over the sampling process, including but not limited to the use of field equipment and collection media, as well as the sampling duration, collection volume or any other collection parameter used by the Client. The findings herein constitute no warranty of the sample's representativeness of any sampled environment, and strictly relate to the samples as they were presented to the laboratory. For recommended sampling collection parameters, please refer to the Sampling and Analysis Guide at www.sgsgalson.com.
- Unrounded results are carried through the calculations that yield the final result and the final result is rounded to the number of significant figures appropriate to the accuracy of the analytical method. Please note that results appearing in the columns preceding the final result column may have been rounded and therefore, if carried through the calculations, may not yield an identical final result to the one reported.
- The stated LOQs for each analyte represent the demonstrated LOQ concentrations prior to correction for desorption efficiency (if applicable).
- Unless otherwise noted within the report, results have not been blank corrected for any field blank or method blank data.

Accreditations SGS Galson holds a variety of accreditations and recognitions. Our quality management system conforms with the requirements of ISO/IEC 17025. Where applicable, samples may also be analyzed in accordance with the requirements of ELAP, NELAC, or LELAP under one of the state accrediting bodies listed below. Current Scopes of Accreditation can be viewed at http://www.sgsgalson.com in the accreditations section of the "About" page. To determine if the analyte tested falls under our scope of accreditation, please visit our website or call Client Services at (888) 432-5227.

National/International	Accreditation/Recognition	Lab ID#	Program/Sector
AIHA-LAP, LLC - IHLAP, ELLAP, EMLAP	ISO/IEC 17025 and USEPA NLLAP	Lab ID 100324	Industrial Hygiene, Environmental Lead,
			Environmental Microbiology
State	Accreditation/Recognition	Lab ID#	Program/Sector
New York (NYSDOH)	ELAP and NELAC (TNI)	Lab ID: 11626	Air Analysis, Solid and Hazardous Waste
Louisiana (LDEQ)	LELAP	Lab ID: 04083	Air Analysis, Solid Chemical Materials

Legend

ppb - Parts per Billion < - Less than mg - Milligrams MDL - Method Detection Limit > - Greater than ug - Micrograms NA - Not Applicable ppm - Parts per Million I - Liters m3 - Cubic Meters NS - Not Specified ppbv - ppb Volume LOQ - Limit of Quantitation kg - Kilograms ND - Not Detected ppmv - ppm Volume ft2 - Square Feet cm2 - Square Centimeters in2 - Square Inches ng - Nanograms



LABORATORY ANALYSIS REPORT

GALSON

6601 Kirkville Road
East Syracuse, NY 13057

(315) 432-5227 FAX: (315) 437-0571 www.sqsqalson.com Client : KCI Technologies
Site : POOLESVILLE HS
Project No. : POOLESVILLE HS

Date Sampled : 08-MAY-23
Date Received : 09-MAY-23

Account No.: 17844 Login No. : L593540

Date Analyzed : 11-MAY-23
Report ID : 1357585

Approved by: JGC

Asphalt Fumes (Benzene-Soluble Fraction)

		Air Vol	Total	Conc
Sample ID	<u>Lab ID</u>	liter	mg	mg/m3
DHS-01E	L593540-1	360	<0.10	<0.28
PHS-02E	L593540-2	360	<0.10	<0.28
PHS-03E	L593540-3	360	<0.10	<0.28
PHS-04E	L593540-4	360	<0.10	<0.28
PHS-05E	L593540-5	360	<0.10	<0.28
PHS-06E	L593540-6	360	<0.10	<0.28
PHS-07E	L593540-7	NA	<0.10	NA
PHS-08E	L593540-8	NA	<0.10	NA

COMMENTS: Please see attached lab footnote report for any applicable footnotes.

Level of Quantitation: 0.10 mg

Analytical Method : mod. NIOSH 5042; Gravimetric

Collection Media : PTFE PW 1u 37mm

Submitted by: KGB

Date : 11-MAY-23

Supervisor : JGC



LABORATORY FOOTNOTE REPORT

GALSON

Client Name : KCI Technologies
Site : POOLESVILLE HS
Project No. : POOLESVILLE HS

Date Sampled: 08-MAY-23 Date Received: 09-MAY-23 Date Analyzed: 11-MAY-23 Account No.: 17844 Login No. : L593540

6601 Kirkville Road East Syracuse, NY 13057 (315) 432-5227 FAX: (315) 437-0571

Www.sgsgalson.com

L593540 (Report ID: 1357585):

SOPs: ic-asphalt(26)

BSF = Benzene Soluble Fraction

L593540 (Report ID: 1357585):

Accuracy and mean recovery data presented below is based on a 95% confidence interval (k=2). The estimated accuracy applies to the media, technology, and SOP referenced in this report and does not account for the uncertainty associated with the sampling process. The accuracy is based solely on spike recovery data from internal quality control samples. Where N/A appears below, insufficient data is available to provide statistical accuracy and mean recovery values for the associated analyte.

Parameter	Accuracy	Mean Recovery
Asphalt Fumes (Benzene-Soluble Fraction) +/-15.7%	93%

772049576880 Date:05/09/23 Shipper:FEDEX Initials:MMM

GALSON

CHAIN OF CUSTODY



FC54524	Ψ		is and annulate this COC also							·
Standard	0%	- 1.3d may ed		ctronically by lo	gging in to you		nt at https://portal.galsoniabs.c	oni/		
d Business Days	35%	Client Acct N	Vo.: Report To :	Jon Coale			Invoice To:	Acco	ounts Payable	
3 Business Days	50%	17844	Company Name :	KCI Techno	logies				TECHNOLOGIES INC	
2 Business Days	75%			936 Ridgeb	rook Road		Address 1 :	936	Ridgebrook Road	·
Next Day by 6pm	100%	Original Pre	Address 2.			-	Address 2 :			
Next Day by Noon	150%	P\$Y69565	City, State Zip :	Sparks Gle		1152	City, State Zip :	Spar	rks, MD 21152	
Same Day	200%	CS Rep:		410 - 891	- 1810				- 316 - 0818	
		TLANCASTI					Email Address :	ap@k	ci.com	
Samples submitted us FreePumpLoan™ Prog			Email reports to :				Comments :			
Samples submitted us		Online COC	NO.:	Jonathan.C	oale@kci.co	om	P.O. No. :			
FreeSamplingBadges*		271103	Comments :			<u>.</u>	Payment info. :	=	vill call SGS Galson to provide ard on File (enter the last five d	
<u> </u>										igno on the the below,
Comments: 63°F;	92% (24; Pa	ithy cloudy	•			State Sampled	į	Please indicate which OEL(s) t OSHA PEL ACGIH TLV IAO: Specify Limit(s)	· · · ·
Site Name : Poolesv	ille H	S Proje	ct: Poolesville HS		Sampled By :		List description	of indu	stry or Process/interferences p	<u>'</u>
	 _					Britany	maos			·
Sample ID * (Maximum of 20 Chara	cters) D.	ate Sampled *	Collection Medium	Sa	nple Volume imple Time imple Area *	Liters V Minutes in², cm², ft² *	Analysis Requested		Method Reference ^	Hexavalent Chromium Process (e.g., welding plating, painting, etc.)
DHS-OIE	6	18123	37mm lum PW PTFE, 2 (black band)	3 (0	L	Asphalt Fume (Benzer Soluble Fraction)	ne	mod. NIOSH 5042; Gravimetric	
PHS-02 E		518193	37mm lum PW PTFE, 2 (black band)	-	60	1.	Asphalt Fume (Benzer Soluble Fraction)	ne	mod. NIOSH 5042; Gravimetric	
^ If the method(s) indi	cated on the	COC are not ou	r routine/preferred method(s)	, we will substit	ute our routine	/preferred methods.	If this is not acceptable, check	here to	have us contact you.	-1
Chain of Custody		Print Name / S	ignature	Date	Time		Print Name /	Signa	# ure	Date Time
Relinquished By: Br	ithny	Maas	Buttony Man	_518/03		Received By :	pear M. M. Gutt	1/1/	w 11 W/9 1 8	9/22 11:074
Relinquished By :	0		0			Received By :		11	1.1000 01	13/11/2
						nples which you are idered as next day's l		<u>. </u>	Online COC No. : 2711 Prep No. : PSY6 Account No. : 1784 Draft : 5/2/2	95658
	All ser	vices are rende	red in accordance with the ap	plicable SGS G	eneral Conditio	ns of Service accessi	ible via: http://www.sgs.com/er	ıДəιm	s-and-Conditions,áspx	



GALSON CHAIN OF CUSTODY

<u> </u>			<u> </u>						
Comments :									
		<u> </u>] · · · · · · · · · · · · · · · · · · ·	— г	Cample Valuma	1:4	1		T.,
Sample (Maximum of 20		Date Sampled *	Collection Medium		Sample Volume Sample Time Sample Area *	Liters Minutes in², cm², ft² *	Analysis Requested	Method Reference ^	Hexavalent Chromium Process (e.g., welding, plating, painting, etc.)
DH2-03	Ē	5/8/23	37mm lum PW PTFE, 2 (black band)	2pc	360	L	Asphalt Fume (Benzene Soluble Fraction)	mod. NIOSH 5042; Gravimetric	
PHS-0'	1Ē	518123	37mm 1um PW PTFE, 2 (black band)	?рс	360		Asphalt Fume (Benzene Soluble Fraction)	mod. NIOSH 5042; Gravimetric	
PH3 - 0	5E	518123	37mm 1um PW PTFE, 2 (black band)	?pc	3 6-0	ل	Asphalt Fume (Benzene Soluble Fraction)	mod. NIOSH 5042; Gravimetric	
PHS - 0	は田	5/8/23	37mm lum PW PTFE, 2 (black band)	?pc	360		Asphalt Fume (Benzene Soluble Fraction)	mod. NIOSH 5042; Gravimetric	
PHS -	67 E	5/8/23	37mm 1um PW PTFE, 2 (black band)	pc?			Asphalt Fume (Benzene Soluble Fraction)	mod. NIOSH 5042; Gravimetric	
PHS -1	78E	5/8/23	37mm 1um PW PTFE, 2 (black band)	;bc	(, 		Asphalt Fume (Benzene Soluble Fraction)	mod. NIOSH 5042; Gravimetric	
☐ A if the method/	s) indicated on t	he COC are not out	routing/professed method/s	ء النبيد ويبد	ubotituto our routino	invoferred mathede	If this is not acceptable, check here to		
Chain of Custody	s, maicated on t	Print Name / Si		Date		preferred methods.	Print Name / Signa		Date Time
Relinquished By :	Britan		Buttary Mass	-518		Received By :]	Megan M. 6 ch May		Date Tippe 9/33 /1,607/4
Relinquished By:	Strikky					Received By :		ary in company	1/05 //100//4
					columns for any san ter 3pm will be consi	•	3	Online COC No. : 27110 Prep No. : PSY6	⁹⁵⁶⁵⁸ O
			<u> </u>		<u> </u>				1 Hh 023 2:32:37 PM
	All	services are render	ed in accordance with the ap	plicable S	GS General Conditio	ns of Service access	sible via: http://www.sgs.com/en/Term	s-and-Conditions.aspx	-